Atkins&Pearce

1-800-837-7477
www.atkinsandpearce.com

Suflex® 8A-150

Flat-Braided Fiberglass Sleeving

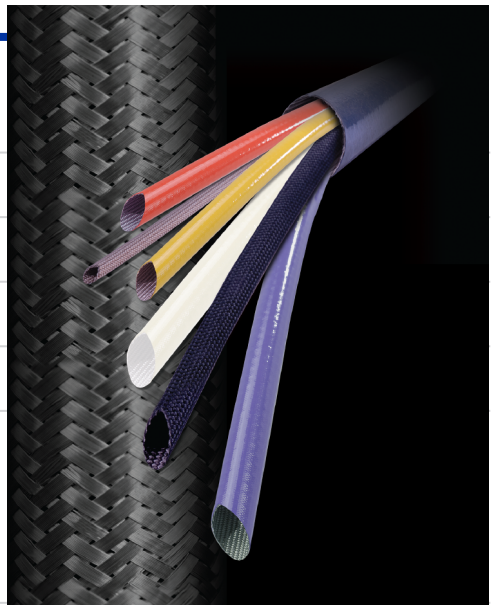

Temp Class: Class R (220˚C)

Material: Flat-Braided Fiberglass

Sizes Available: 1/16" through 1" I.D.

Colors Available: Natural, Silver Grey, Clear

Applicable Standards: MIL-Y-1140 Form 3

Features

- Nominal wall of 8 mils.
- Thin walled.
- Specialty colors available by request for heavy varnish treated sleeving.

Product Description

Suflex 8A-150 is a flat-braided fiberglass sleeving with a nominal wall of 8 mils. Suflex 8A-150 can be provided untreated, light varnish treated, heavy varnish treated or heat treated.

Suggested Applications

Suflex 8A-150 is used to provide space insulation between conductors. The flat construction makes it especially useful on thin rectangular conductors and as tying tape in some applications.

1-800-837-7477
www.atkinsandpearce.com

Suflex® 8A-150

*All Atkins & Pearce coated insulation solutions are REACH and RoHS compliant.