


EXPANDABLE BRAIDED SLEEVING

# MONOFLEX<sup>®</sup> PET FR TW



## Monoflex PET<sup>®</sup> FR TW PRODUCT HIGHLIGHTS

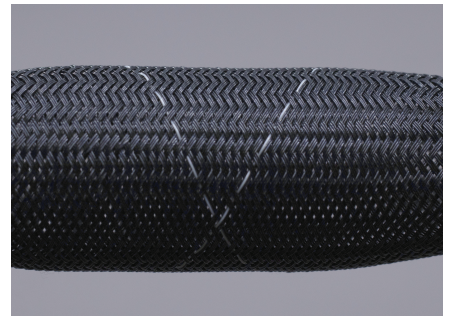

Maximum Operating  
Temperature: 125°C



Flame Retardant



Scissor Cut Ready  
(Non-Fray)



RoHS/REACH Compliant



Halogen Free

**Atkins & Pearce's Monoflex<sup>®</sup> PET FR TW** is a unique combination of our PET FR and PET TW sleeveings. This flame-retardant and tight-weave sleeveing is universally known for having excellent abrasion resistance, high coverage, increased density, and is durable against heat operating up to 125°C. MONOFLEX<sup>®</sup> PET FR TW is ideal for use where flame-retardant is required and applications where snag resistance, coverage, and protection are needed. This sleeve is tightly woven for additional coverage and provides a cost-effective solution for abrasion protection. It is relied on in a wide variety of applications such as: automotive, marine, heavy equipment, industrial, and electronic wire harness applications.

Monoflex<sup>®</sup> PET FR TW is available in a couple of colors to assist in special identification for safety and other needs. Below is a complete list of the standard sizes we offer in this sleeveing. Additionally, cut lengths are available upon request.

NOMINAL ID	MAX EXPANSION	WALL THICKNESS
1/8 inch	1/4 inch	0.025 inch
1/4 inch	3/8 inch	0.025 inch
3/8 inch	1/2 inch	0.025 inch
1/2 inch	3/4 inch	0.025 inch
3/4 inch	1-1/4 inch	0.025 inch
1 inch	1-1/2 inch	0.025 inch
1-1/4 inch	1-3/4 inch	0.025 inch
1-1/2 inch	2-1/2 inch	0.025 inch

For additional information on Monoflex<sup>®</sup> PET FR TW's features and color offerings please contact our Sales & Marketing Team via phone or email at the addresses below.

**Atkins&Pearce**

One Braid Way, Covington, KY 41017 USA  
1.800.837.7477 | info@atkinsandpearce.com | www.atkinsandpearce.com

EXPANDABLE BRAIDED SLEEVING

# MONOFLEX<sup>®</sup> PET FRTW

## Performance Metrics

PROPERTY (TEST)	RESULT
Abrasion (ASTM D-4060)	8,500 cycles
Low Temperature Flexibility (below freezing)	No cracking or deformation

## Thermals

MAX OPERATING TEMPERATURE	MELTING POINT
125°C / 257°F	230°C - 260°C / 446°F - 500°F

## Chemical Resistance

	Poor	Fair	Good	Excellent
Degradation by Alcohols	Red	Orange	Yellow	White
Degradation by Alkali	Red	Orange	Yellow	White
Degradation by Hydrocarbons	Red	Orange	Yellow	White
Degradation by Ketones	Red	Orange	Yellow	White
Degradation by Organic Acids	Red	Orange	Yellow	White
Degradation by Strong Acids	Red	Orange	Yellow	White
Degradation by UV Light	Red	Orange	Yellow	White

## Monofilament Properties

SINGLE-STRAND DIAMETER	0.01 inch
DENSITY	1.38 g/cc
SINGLE-STRAND TENSILE STRENGTH	8.5 lbs.
MOISTURE ABSORPTION	0.20%



### CONTACT US!

Our manufacturing facility and office is centrally located in northern Kentucky.



## Atkins&Pearce

One Braid Way, Covington, KY 41017 USA

1.800.837.7477 | info@atkinsandpearce.com | www.atkinsandpearce.com

**LAST REVISED: May 2024** | The suggested application is provided by Atkins & Pearce merely as an additional tool to assist in making an appropriate selection. This is only provided to serve as suggestions of sleeving that may be appropriate based on certain criteria and should not be relied upon as determinative or as a substitute for customer testing. Many variables exist in a sleeve's flexibilities, resistances, and treatment. Final product selection should always be confirmed through the customer's own testing process to determine if a specific product is the correct choice for a particular application. Atkins & Pearce is not responsible for selections made by the customer using any of the reference material provided. For optimal performance in specific systems, we strongly recommend that customers conduct exhaustive tests in their own lab and consider retaining samples for their future internal reference. The importance of product testing and data validation cannot be overstated. As the customer, you and your company are responsible for appropriately testing all Atkins & Pearce product used in your application and for making the final selection based upon meeting appropriate safety and electrical standards. Atkins & Pearce makes no representation or warranty, expressed or implied, at law or in equity, in respect of the information provided, including, without limitation, with respect to merchantability or fitness for any particular purpose, which representations or warranties are hereby expressly disclaimed.