

# Motor On<sup>®</sup>

## High Performance Motor Repair Sleeving

**Temp Class:** Class F (155° C)


**Grades Available:** C (2,500 V)

**Material:** Acrylic Coated Fiberglass

**Sizes Available:** AWG #24 through 1/2" I.D.

**Colors Available:** Natural

**Applicable Standards:** NEMA TF-1

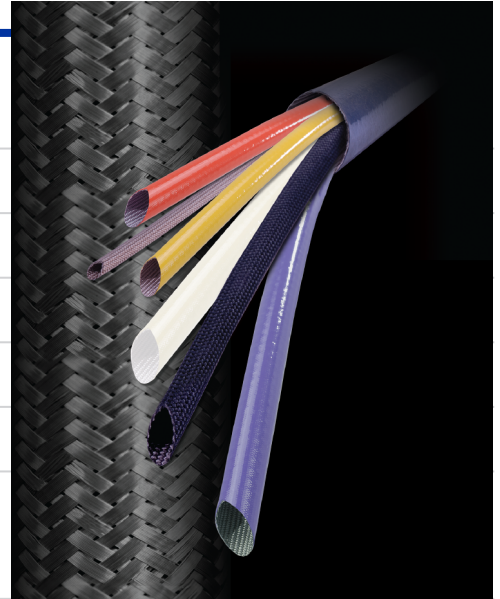

## Features

- ▶ Outstanding mechanical and electrical protection.
- ▶ Compatible with most magnet coatings such as polyester, acrylic, polyamide, polyimide, epoxy and phenolic.

## Product Description

Motor On is a finely braided fiberglass sleeving impregnated and coated with a dielectric film of acrylic resin. Motor On was designed and developed in response to the motor repair market's demand for a high performance, cost-competitive sleeving insulation. The unique production process results in a noticeably softer hand, increasing surface texture to enhance the compatibility between sleeve and resin while also making installation easier for operators.

## Suggested Applications

Motor On is recommended as a universal sleeving for motor repair applications.

# Motor On<sup>®</sup>

## Sizes Available

Size	Inside Diameter, in. (mm)		Nominal I.D.
	Maximum	Minimum	
24 AWG	0.027 (0.69)	0.020 (0.51)	0.022
22 AWG	0.032 (0.81)	0.025 (0.64)	0.027
20 AWG	0.039 (0.99)	0.032 (0.81)	0.034
19 AWG	0.044 (1.11)	0.036 (0.91)	0.040
18 AWG	0.049 (1.25)	0.040 (1.02)	0.042
17 AWG	0.054 (1.37)	0.045 (1.14)	0.047
16 AWG	0.061 (1.55)	0.051 (1.30)	0.053
15 AWG	0.067 (1.70)	0.057 (1.45)	0.059
14 AWG	0.074 (1.88)	0.064 (1.63)	0.066
13 AWG	0.082 (2.08)	0.072 (1.83)	0.076
12 AWG	0.091 (2.31)	0.081 (2.06)	0.085
11 AWG	0.101 (2.60)	0.091 (2.31)	0.095
10 AWG	0.112 (2.80)	0.102 (2.60)	0.106
9 AWG	0.124 (3.20)	0.114 (2.90)	0.118
8 AWG	0.141 (3.60)	0.129 (3.30)	0.133
7 AWG	0.158 (4.00)	0.144 (3.70)	0.148
6 AWG	0.178 (4.50)	0.152 (4.10)	0.166
5 AWG	0.198 (5.00)	0.182 (4.60)	0.186
4 AWG	0.224 (5.70)	0.204 (5.20)	0.208
3 AWG	0.249 (6.30)	0.229 (5.80)	0.234
2 AWG	0.278 (7.10)	0.258 (6.60)	0.263
1 AWG	0.311 (7.90)	0.289 (7.30)	0.294
0 AWG	0.347 (8.80)	0.325 (8.30)	0.330
3/8"	0.399 (10.10)	0.375 (9.50)	0.375
7/16"	0.462 (11.70)	0.438 (11.10)	0.438
1/2"	0.524 (13.30)	0.500 (12.70)	0.500

\*All Atkins & Pearce coated insulation solutions are REACH and RoHS compliant.