

Enclose[®] SB PRODUCT HIGHLIGHTS



**Maximum Operating
Temperature: 125°C / 257°F**

HF

Halogen Free



REACH/RoHS Compliant



**UL Temperature & Flame
Rated (#E118600)**

Atkins & Pearce's Enclose[®] SB is a semi-rigid split braid sleeving with self-closing properties. This sleeving is ideal for electrical wire harnessing situations where removal and re-installation is common. Enclose[®] SB self-closing properties allow the sleeve to bend without splitting and accommodate a range of bundle sizes to close around the application area without additional reinforcements. It is rated to 125°C and ensures that no heat or moisture remains trapped due to its porous surface.

Enclose[®] SB is available in a variety of colors to assist in special identification for safety and other needs. Below is a complete list of the standard sizes we offer in this sleeving. Additionally, cut lengths are available upon request.

NOMINAL ID	OVERLAP	WALL THICKNESS
1/8 inch *	25%	0.065 inch
1/4 inch *	25%	0.065 inch
3/8 inch *	25%	0.065 inch
1/2 inch *	25%	0.065 inch
3/4 inch *	25%	0.065 inch
1 inch *	25%	0.065 inch
1 1/4 inch *	25%	0.065 inch
1 1/2 inch *	25%	0.065 inch
2 inch *	25%	0.065 inch

*Available for online purchase.

For additional information on Enclose[®] SB, please contact our team via phone or email at the address below.

Atkins&Pearce

One Braid Way, Covington, KY 41017 USA

1.800.837.7477 | info@atkinsandpearce.com | www.atkinsandpearce.com

EXPANDABLE BRAIDED SLEEVING

ENCLOSE® SB


Performance Metrics

PROPERTY (TEST)	RESULT
Abrasion (ASTM D-4060)	6,000 cycles
Heat Age @ 168 Hours (ASTM D-3045)	No cracking, melting, or deformation
Low Temperature Flexibility (below freezing)	No cracking or deformation

Thermals

MAX OPERATING TEMPERATURE	MELTING POINT
125°C / 257°F	250°C / 482°F

Chemical Resistance

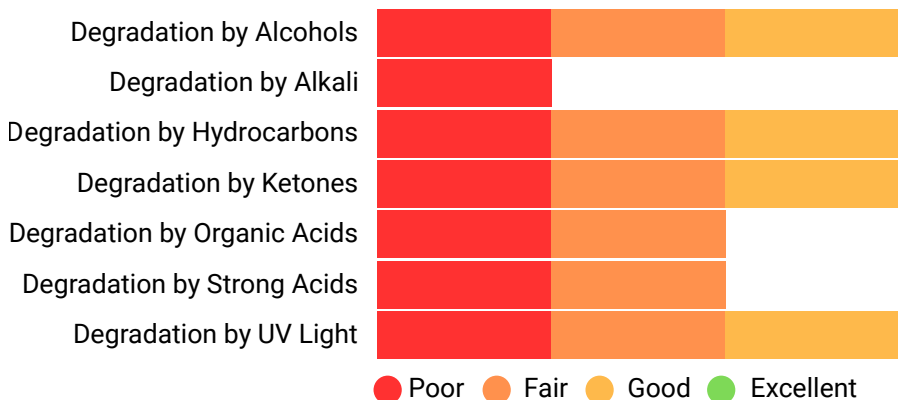

Monofilament Properties

SINGLE-STRAND DIAMETER	SINGLE-STRAND TENSILE STRENGTH
0.015 inch	8.5 lbs.
DENSITY	MOISTURE ABSORPTION
1.38 g/cc	0.20%



CONTACT US!

Our manufacturing facility is centrally located in northern Kentucky.



Atkins&Pearce

One Braid Way, Covington, KY 41017 USA

1.800.837.7477 | info@atkinsandpearce.com | www.atkinsandpearce.com

LAST REVISED: May 2026 | The suggested application is provided by Atkins & Pearce merely as an additional tool to assist in making an appropriate selection. This is only provided to serve as suggestions of sleeving that may be appropriate based on certain criteria and should not be relied upon as determinative or as a substitute for customer testing. Many variables exist in a sleeve's flexibilities, resistances, and treatment. Final product selection should always be confirmed through the customer's own testing process to determine if a specific product is the correct choice for a particular application. Atkins & Pearce is not responsible for selections made by the customer using any of the reference material provided. For optimal performance in specific systems, we strongly recommend that customers conduct exhaustive tests in their own lab and consider retaining samples for their future internal reference. The importance of product testing and data validation cannot be overstated. As the customer, you and your company are responsible for appropriately testing all Atkins & Pearce product used in your application and for making the final selection based upon meeting appropriate safety and electrical standards. Atkins & Pearce makes no representation or warranty, expressed or implied, at law or in equity, in respect of the information provided, including, without limitation, with respect to merchantability or fitness for any particular purpose, which representations or warranties are hereby expressly disclaimed.